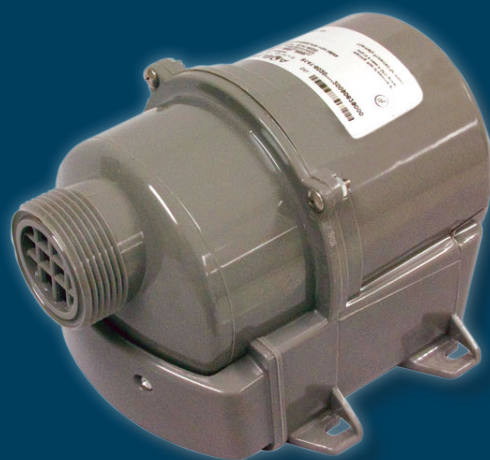




Quiet-FloBlowerAustralia

Unmatched performance. Proven reliability.

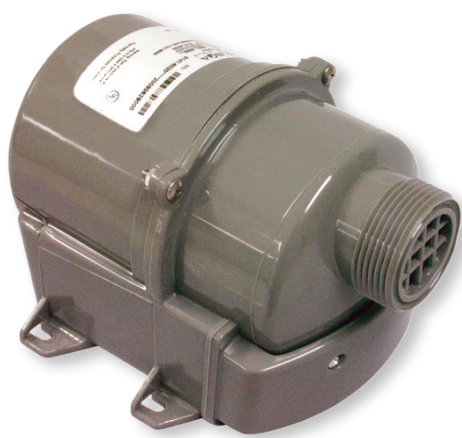
- Small compact foot print
- Works with any control
- Easy to install and service
- Certified by Energy Safe Victoria
- AMP Connector or Standard Wall Connector









BALBOA
water group

Quiet-Flo Blower For Australia

All models have compact designs which allow for constrained space installations. Additionally, the Quiet-Flo air intake is below the output so that the blower can be mounted against a wall without any concern for flow restrictions. The blower will work with any air or electronic control system and comes with a 4 Pin AMP Connector or Standard Wall Plug. Optional unionized connections and check valves are available.



SPECIFICATIONS		
Volts	230-240VAC / 50/60Hz	
HP	1	
AMPS	3.8A	
Cord	 	4 Pin AMP Connector or Standard Wall Plug
OPTIONS		
42170	C/V ¼ LB	
42225 42230	C/V ¼ LB HOSE SPG C/V ⅜ LB HOSE SPG	
42235	C/V ¼ LB x 1" slip	
42175	1.5" Slip quick disconnect	

Model Overview

8142+0050	Blower Quiet Flow Spa 1.0Hp 2meter Cord (Single)
8142-0060	Blower Quiet Flow Spa 1.0Hp Cord Aus Plug (Bulk)
8142+0060	Blower Quiet Flow Spa 1.0Hp Cord Aus Plu (Single)

Note: All Quiet-Flo blower with material numbers starting with 8142-XXXX are US Patent No. 8,137,802.

Measurements apply to all models

