

# BP21MS2B Tech Sheet

**Customer:** Balboa Water Group

**Part Number:** 56629-02 800 Incoloy 3kW  
56630-02 825 Incoloy 3kW  
56631-02 Titanium 3kW

Custom Box Overlay   
Box Overlay Part Number N/A

CE System Model: BP21-BP21MS2B-RCA3.0K  
Software Version ID: M100\_225 V36.0  
Software Version: 36.0  
File Name: BP2100\_36.0\_BP21MS2B\_TP4.hex  
Configuration Signature: 4FEA5138

Eng. Project Number: 4776

## Control Panels:

spaTouch™2	Any version (version 2.0 or later required for bba™2 fully integrated functionality)
Icon spaTouch™	Any version (version 3.36 or later required for bba™2 fully integrated functionality)
Menued spaTouch™	Any version (version 2.8 or later required for bba™2 integrated functionality)
TP900	Version 3.1 and later (Version 3.13 or later required for bba™)
TP800	Version 3.1 and later (Version 3.13 or later required for bba™; version 4.11 or later required for bba™2 integrated functionality)
TP600	Version 2.7 and later
TP400T CE	Version 2.7 and later (TP400T US should <u>not</u> be used)



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.

# System Revision History

Part #	EPN	Date	Originator	Changes Made
ZT000092	4272	04-23-14	BWG	New generic MicroSilk® system, with up to 2 Pumps, plus optional Blower and optional Circ.
56629 56630 56631	4272	05-01-14	BWG	Released to production.
56629-01 56630-01 56631-01	4503	04-23-15	BWG	Add TP400T support.
56629-01 56630-01 56631-01	4776	11-01-16	BWG	Updated to latest software version, adding topside-intergrated bba™ 2 support. Released to production.

bba™ & bba™2 (Balboa Bluetooth Amp) connection is documented seperately.

bba™ is only integrated into graphic display panels (TP800, TP900 and spaTouch™). With TP600 the Aux button operation of bba™ must be used.

bba™ 2 is only integrated into graphic display panels (TP800, TP900 and spaTouch™). bba™ 2 does not support Aux button operation.

# Basic Functions Setup 1-16

## Power Requirements:

**Single Service** [3 wires (line, neutral, ground)]  
230VAC, 50/60Hz\*, 1p, 32A, (Circuit Breaker rating = 40A max.)

**Dual Service** N/A

**3-Service** [5 wires (line 1, line 2, line 3, neutral, ground)]  
230VAC line-to-neutral\*\*, 50/60Hz\*, 3p, 16A, (Circuit Breaker rating = 20A max each phase line.)

\* BP systems automatically detect 50Hz vs 60Hz.

\*\* 3-phase service measured line-to-line will read about 400V, but BP systems do not use it line-to-line.

**IMPORTANT** - Service must include a neutral wire, with a line to neutral voltage of 230VAC.

### HiPot Testing Note:

Disconnect slip terminal with green wires from J11 prior to performing HiPot test. Failure to disconnect may cause a false failure of the test. Reconnect terminal to J11 after successful completion of HiPot test.

## Migrating From BP21MSSH:

If you are migrating from the BP21MSSH model to this BP21MS2B model, this chart shows how the Setup numbering has changed between these 2 models.

BP21MSSH Setup #	BP21MS2B Setup #
1	2
2	4
3	8
4	12
5	14
6	16

# Basic Functions Setup 1-16

---


## System Outputs:

Pump 1	230VAC	2-Speed 1-Speed in Setups 5, 6, 9, 10	12A max	15-minute timer for High Speed, 15-Minute timer for Low Speed
		This is the heater pump in Setups 11-16 Must deliver 20 GPM through heater		
Pump 2	230VAC	2-Speed 1-Speed in Setups 3-6, 13, 14 Unused in Setups 7-10, 15, 16	12A max	15-minute timer
MicroSilk®	230VAC	1-Speed	8A max	30-minute timer
Blower	230VAC	1 Speed Unused in Setups 2, 4, 6, 8, 10, 12, 14, 16	4A max	15-minute timer
Circ Pump	230VAC	1-Speed	2A max	Programmable Filtration Cycles + Polling This is the heater pump in Setups 1-10 Must deliver 20 GPM through heater
Ozone	230VAC		.5A max	Slaved to Circ Pump in Setups 1-10 Independent in Setups 11-16
Spa Light	10VAC	On/Off	1A max	240-minute timer.
A/V (Stereo)	230VAC	Hot	5A max	Always on
Heater	3.0kW @ 240VAC max			

MicroSilk® is a registered trademark of Jason International

# Hardware Setup

## Wiring Diagram

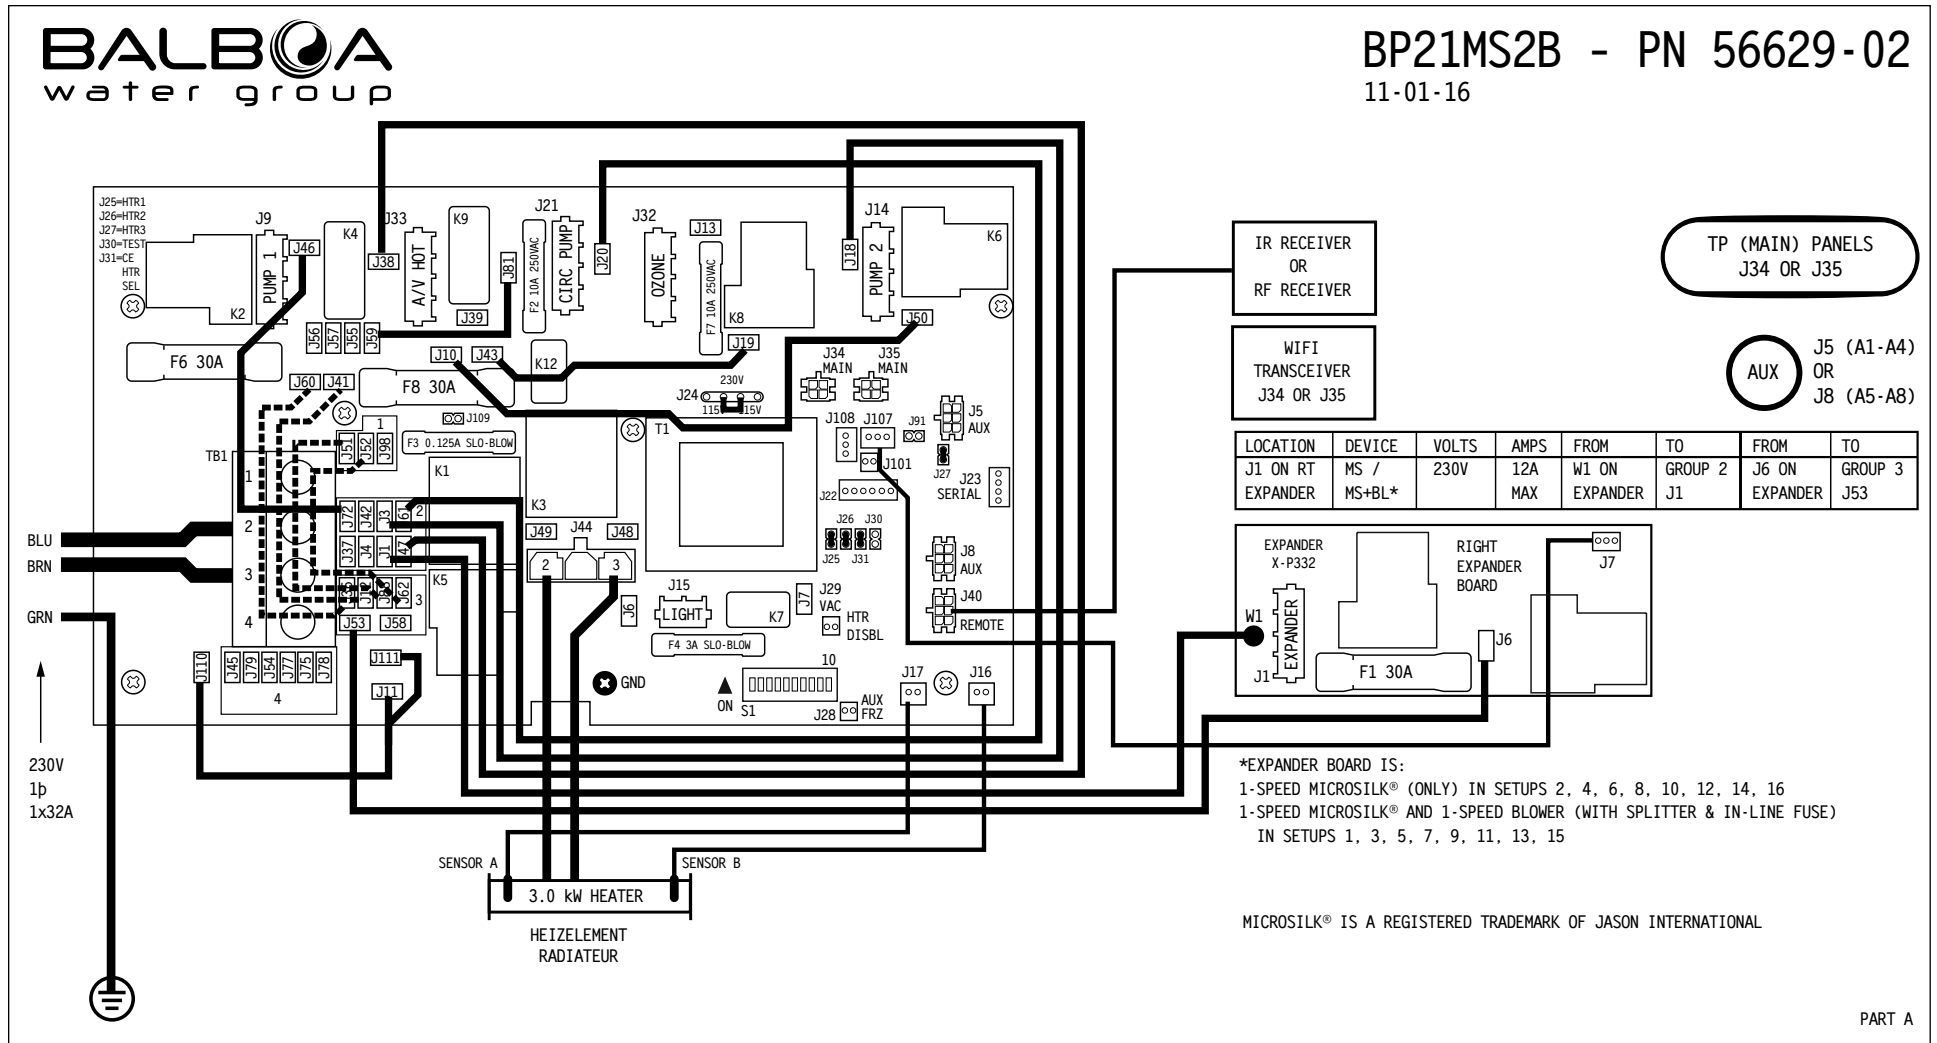

# Hardware Setup

## Settings

SINGLE SERVICE 230V 1p / 1x32A, THREE-SERVICE 230V 1p / 3x16A

LOCATION	DEVICE
J9	NETZSTROMVERSORGUNG 2/1-GESCHW.-PUMPE 1 ALIMENTATION POMPE 1 A 2/1 VITESSES 2/1-SPEED PUMP 1
J14	NETZSTROMVERSORGUNG 2/1-GESCHW.-PUMPE 2 ALIMENTATION POMPE 2 A 2/1 VITESSES 2/1-SPEED PUMP 2
	P2 LINE 1 CONNECTION J19 to J43, J50 to J10
J15	10V BELEUCHTUNG ECLAIRAGE BAIN HYDRO SPA LIGHT
J21	KREISLAUF PUMPE POMPE DE CIRCULATION CIRC PUMP (SETUPS 7-14, 16)
J32	OZONGENERATOR GENERATOROZONE OZONE GENERATOR
	CIRC AND OZONE LINE 1 CONNECTION J81 to J59
J33	TV / AV
J40	IR RECIEVER
J5, J8	AUX PANEL(S) - AX10, AX20, AX30, AX40

SETUP #	CIRC PUMP	PUMP 1	PUMP 2	MICROSILK®	BLOWER	TEMP SCALE
1#	PROGRAMMABLE FILTRATION + POLLING	2-SPEED	2-SPEED	1-SPEED	1-SPEED	°C
2	PROGRAMMABLE FILTRATION + POLLING	2-SPEED	2-SPEED	1-SPEED	NONE	°C
3#	PROGRAMMABLE FILTRATION + POLLING	2-SPEED	1-SPEED	1-SPEED	1-SPEED	°C
4	PROGRAMMABLE FILTRATION + POLLING	2-SPEED	1-SPEED	1-SPEED	NONE	°C
5#	PROGRAMMABLE FILTRATION + POLLING	1-SPEED	1-SPEED	1-SPEED	1-SPEED	°C
6	PROGRAMMABLE FILTRATION + POLLING	1-SPEED	1-SPEED	1-SPEED	NONE	°C
7#	PROGRAMMABLE FILTRATION + POLLING	2-SPEED	NONE	1-SPEED	1-SPEED	°C
8	PROGRAMMABLE FILTRATION + POLLING	2-SPEED	NONE	1-SPEED	NONE	°C
9#	PROGRAMMABLE FILTRATION + POLLING	1-SPEED	NONE	1-SPEED	1-SPEED	°C
10	PROGRAMMABLE FILTRATION + POLLING	1-SPEED	NONE	1-SPEED	NONE	°C
11#	NONE	2-SPEED	2-SPEED	1-SPEED	1-SPEED	°C
12	NONE	2-SPEED	2-SPEED	1-SPEED	NONE	°C
13#	NONE	2-SPEED	1-SPEED	1-SPEED	1-SPEED	°C
14	NONE	2-SPEED	1-SPEED	1-SPEED	NONE	°C
15#	NONE	2-SPEED	NONE	1-SPEED	1-SPEED	°C
16	NONE	2-SPEED	NONE	1-SPEED	NONE	°C

\*SETUPS WITH BLOWER REQUIRE BP2X-WIRE KIT PN30893

INSTEAD OF  
SETUP #6,  
THIS SYSTEM IS  
CONFIGURED IN  
SETUP #:



FOR SUPPLY CONNECTIONS,  
USE CONDUCTORS SIZED ON THE  
BASIS OF 60°C AMPACITY BUT  
RATED MINIMUM OF 90°C.


USE COPPER CONDUCTORS ONLY.  
EMPLOYER UNIQUEMENT  
DES CONDUCTEURS DE CUIVRE.

TORQUE RANGE FOR  
MAIN TERMINAL BLOCK (TB1):  
27-30 IN. LBS.  
(31.1-34.5 kg cm)

**BALBOA**  
water group

**BP21MS2B - PN 56629-02**  
11-01-16

PART B

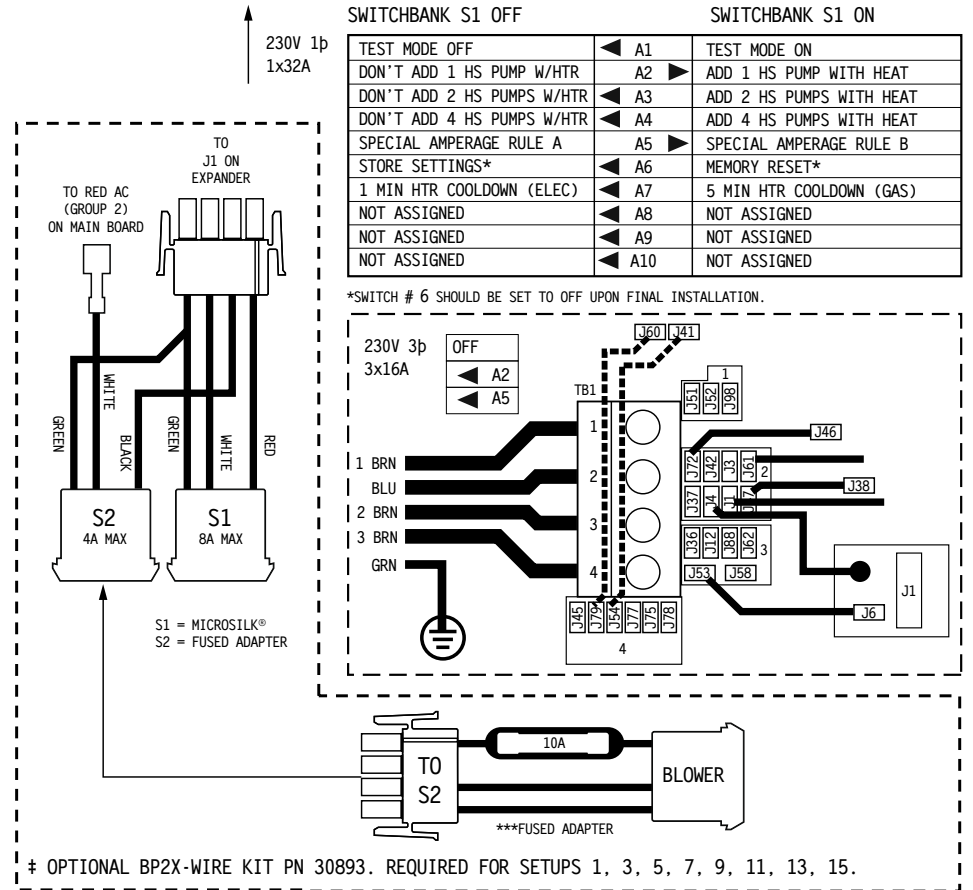

# Setup Reference Table

Setup #	Circ Pump	Pump 1	Pump 2	MicroSilk®	Blower	Temp Scale
1	Programmable Filtration + Polling	2-Speed	2-Speed	1-Speed	1-Speed	°C
2	Programmable Filtration + Polling	2-Speed	2-Speed	1-Speed	None	°C
3	Programmable Filtration + Polling	2-Speed	1-Speed	1-Speed	1-Speed	°C
4	Programmable Filtration + Polling	2-Speed	1-Speed	1-Speed	None	°C
5	Programmable Filtration + Polling	1-Speed	1-Speed	1-Speed	1-Speed	°C
6	Programmable Filtration + Polling	1-Speed	1-Speed	1-Speed	None	°C
7	Programmable Filtration + Polling	2-Speed	None	1-Speed	1-Speed	°C
8	Programmable Filtration + Polling	2-Speed	None	1-Speed	None	°C
9	Programmable Filtration + Polling	1-Speed	None	1-Speed	1-Speed	°C
10	Programmable Filtration + Polling	1-Speed	None	1-Speed	None	°C
11	None	2-Speed	2-Speed	1-Speed	1-Speed	°C
12	None	2-Speed	2-Speed	1-Speed	None	°C
13	None	2-Speed	1-Speed	1-Speed	1-Speed	°C
14	None	2-Speed	1-Speed	1-Speed	None	°C
15	None	2-Speed	None	1-Speed	1-Speed	°C
16	None	2-Speed	None	1-Speed	None	°C

**System** (and any replacement board)  
**is shipped in Setup 6**


Color Key	Output
	XP332
	XP332 and Splitter and in-line Blower fuse
	J14 (Aux) on Main Board

# Changing Software Setups with TP800 / TP900 / spaTouch™ Menued Panel

## Test Menu Access (S1, Switch 1 ON) *Service Technician ONLY.*


**DANGER! HIGH VOLTAGE WILL BE ACCESSIBLE! SERVICE TECHNICIAN ONLY!**

While the system is running, move DIP Switch 1 (on S1 on the Main circuit board) to ON. The system will enter Test Mode. Moving DIP Switch 1 to OFF will exit Test Mode.



## Software Setups

Under the TEST Menu, the Setup screen will allow changing the Setup from 1 to any number established by the Manufacturer. Changing the Setup may require wiring changes as well.

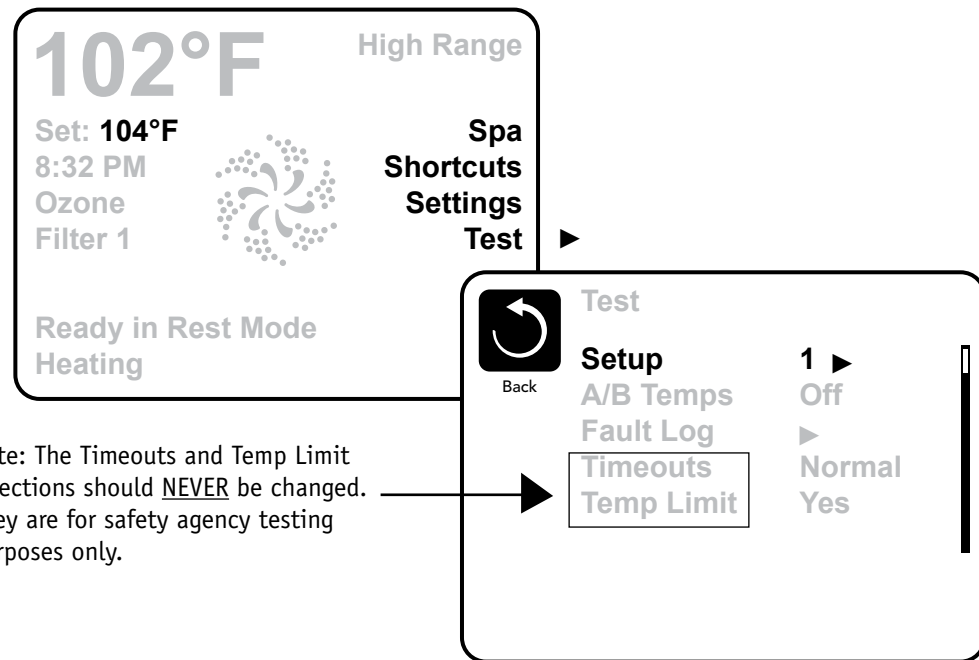




# Changing Software Setups with TP600 / TP400

## Test Menu Access (S1, Switch 1 ON) *Service Technician ONLY.*

**DANGER! HIGH VOLTAGE WILL BE ACCESSIBLE! SERVICE TECHNICIAN ONLY!**

While the system is running, move DIP Switch 1 (on S1 on the Main circuit board) to ON. The system will enter Test Mode. Moving DIP Switch 1 to OFF will exit Test Mode.

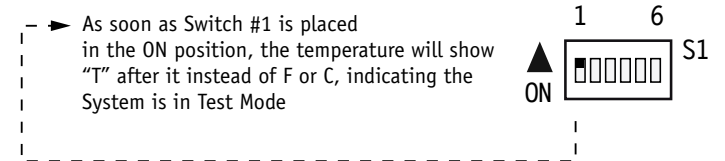


## Software Setups

Under the TEST Menu, the Setup screen will allow changing the Setup from 1 to any number established by the Manufacturer. Changing the Setup may require wiring changes as well.

**You will have 1 minute** to complete the setup change after you manually exit Priming Mode. (Once familiar with the process, the Setup change should take less than 15 seconds.)



When the panel displays RUN PMPS PURG AIR, press any Temperature button ONCE to exit Priming Mode. You should see “---T” where the T indicates the system is in Test Mode.



Continued on Next Page.

# Changing Software Setups with TP600 / TP400 Continued



Again, **You will have 1 minute** to complete the setup change after you manually exit Priming Mode.

Immediately after exiting Priming Mode, press this sequence of buttons: Warm\*, Light, Warm, Warm, Warm, Warm. Continue to press Warm until the display shows the Setup Number (S-01, S-02, etc.) you want to switch to. When the correct setup number is showing, press Light once, and the system will reset, using the newly-selected Setup from that point on.

Move DIP Switch 1 to the OFF position to take the spa out of Test Mode. °F or °C will replace °T.

**Using a permanent marker, write the Setup number on the Setup label mounted inside the system lid (right). This is very important to any service person in the future who may need to replace a circuit board or system and needs to change the Setup on a replacement part while in the field.**

NOTE: Changing the Setup may require wiring changes as well - refer to the wiring diagram or wiring diagram addendum.

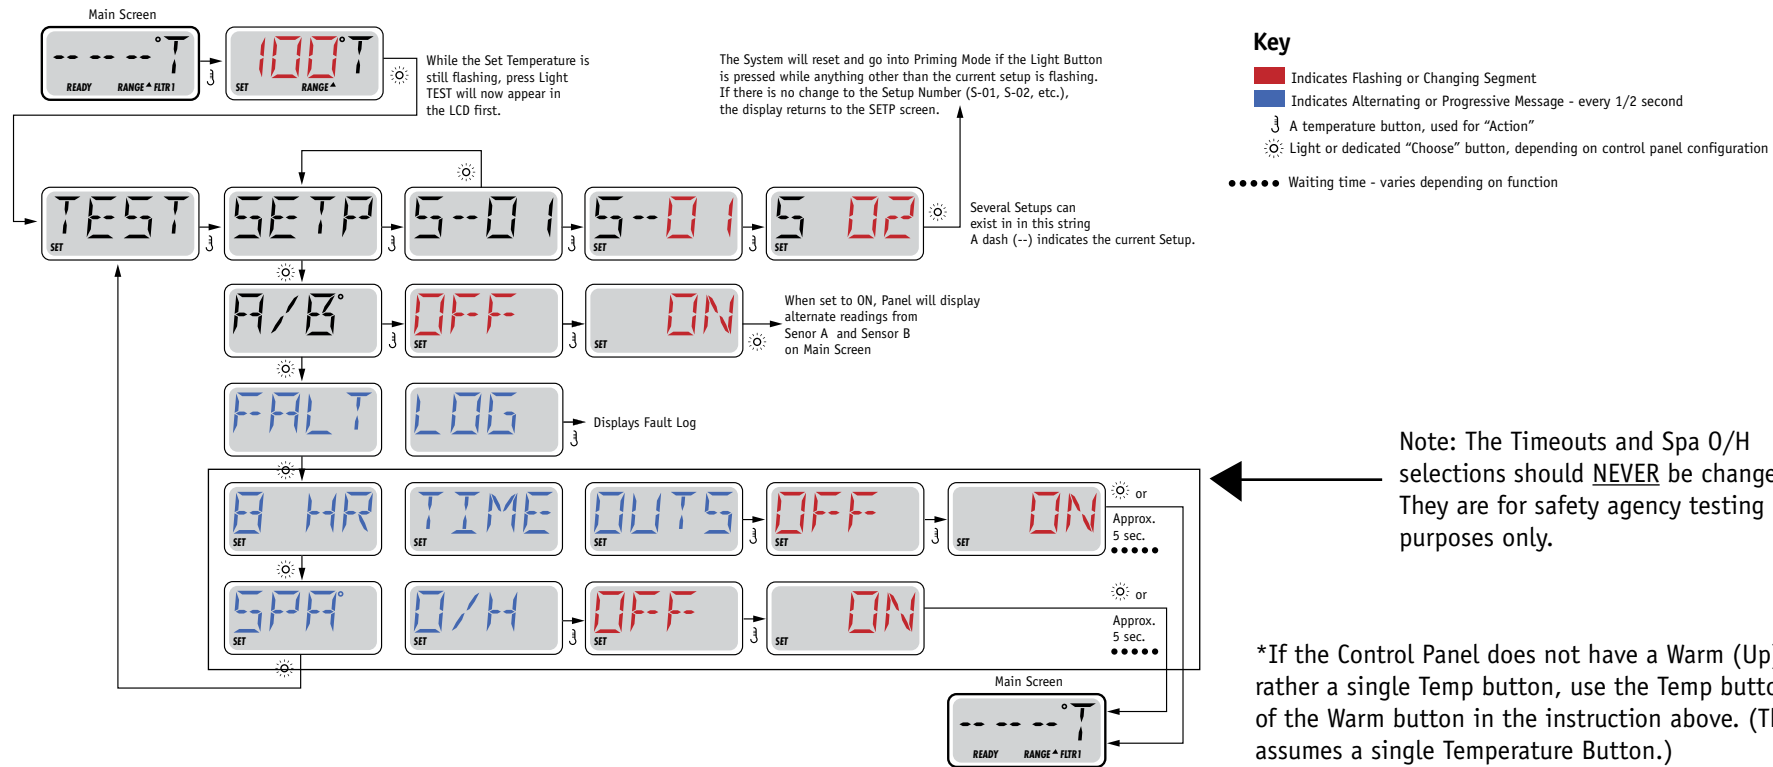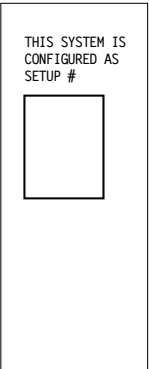

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.



# Equipment Expansion

---

## Expansion Features


### Control Connection

	<b>Default</b>	<b>Fuse</b>
Relay 1 (J101)	Undefined	None
Relay 7/8 (J107)	See Below	30A
	1-Speed MicroSilk® (only) In Setups 2, 4, 6, 8, 10, 12, 14, 16	
	1-Speed MicroSilk® And 1-Speed Blower (With Splitter & In-Line Fuse) In Setups 1, 3, 5, 7, 9, 11, 13, 15	
Relay 9/10 (J108)	Undefined	None

# DIP Switch Functions

## Fixed-function DIP Switches

- |    |                                                                                                                                                                                                        |
|----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A1 | Test Mode (normally Off).                                                                                                                                                                              |
| A2 | In "ON" position, add one high-speed pump (or blower) with Heater.                                                                                                                                     |
| A3 | In "ON" position, add two high-speed pumps (or 1 HS Pump and Blower) with Heater.                                                                                                                      |
| A4 | In "ON" position, add four high-speed pumps (or 3 HS Pumps and Blower) with Heater.                                                                                                                    |
| A5 | In "ON" position, enables Special Amperage Rule B. See Special Features section under Configuration Options for functionality with your system.<br>In "OFF" position, enables Special Amperage Rule A. |
| A6 | Persistent memory reset (Used when the spa is powering up to restore factory settings as determined by software configuration).                                                                        |



**A2, A3, and A4** work in combination to determine the number of high-speed devices and blowers that can run before the heat is disabled. i.e. A2 and A3 in the ON position and A4 in the OFF position will allow the heater to operate with up to 3 high-speed pumps (or two HS Pumps and Blower) running at the same time. Heat is disabled when the fourth high-speed pump or blower is turned on.












**Note:** A2/A3/A4 all off = No heat with any high-speed pump or blower.

## Assignable DIP Switches

- |    |                                                                                                                                                                               |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A7 | In "ON" position, enables a 5-minute cooldown for some gas heaters (Cooling Time B).<br>In "OFF" position, enables a 1-minute cooldown for electric heaters (Cooling Time A). |
|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

*Undesignated switches are not assigned a function.*

# Jumper Definitions

<b>J109</b>	Non Applicable on CE models	J109 
<b>J91</b>	Real Time Clock Enable/Disable <b>Note:</b> This Jumper should NOT be shorted when the Control Panel can display time of day.	J91 
<b>J30</b>	Do Not Use	
<b>J31</b>	Jumper on 1 pin with 2.0kW or smaller heater Jumper on 2 pins with a 3.0kW or higher heater	J31 
<b>J29</b>	Heater Disable Switch Connection. If J29 is shorted by any means, the heater will not run until J29 is no longer shorted. If J29 is shorted during power-up “J29” will appear on the panel. The message can be dismissed with a button press, and is the only control panel notification of J29 being shorted. No message is displayed if J29 is shorted after power-up, but the heater will not run until J29 is no longer shorted. J29 expects a switch closure (not a voltage) as the command signal. In some areas, a local power company may offer discounts based on voluntary “power shedding” devices that may be installed in conjunction with the spa.	J29 
<b>J25, J26, J27</b>	Heater Type Settings. <b>Note:</b> Factory Configured do not change.	J25  J26  J27 
<b>J24</b>	Jumper on center two pins (230V) when heater is running at 240V. Two Jumpers installed; one on left 2 pins and one on right 2 pins (115V) when heater is running at 120V.	J24     230V 115V 15V

## Warning!

Setting DIP switches or jumpers incorrectly may cause abnormal system behavior and/or damage to system components. Refer to Switchbank illustration on Wiring Configuration page for correct settings for this system. Contact Balboa if you require additional configuration pages added to this tech sheet.

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.

# Replacement Parts

---

## PCBA:

Main PCBA: 56632-02  
Expander PCBA: 55137

## HEATER(s):

Plug + Click Heater Kit: 58300 3.0kW 800Inc  
58301 3.0kW 825Inc  
58302 3.0kW Titanium  
Temp Sensor Kit: 53605

## CABLES:

N/A

## FUSES:

Part Number	Amperage	Location
30136	30A	F6, F8, F1 (Expander)
20600	3A	F4
26397	1/8A	F3
30122	10A	F2, F7

# BP2100 Configuration Options

---

## General Features

Feature	Default
Pump 1 in Filter Cycle (Circ Only)	No
Pump 1 Low Timer	<i>15 Minutes</i>
General Pump Timer	15 Minutes
Blower Timer	15 Minutes
MicroSilk® Timer	30 Minutes
Mister Timer	15 Minutes
Light Timer	240 Minutes
Circ (when enabled)	Programmable + Polling
Cleanup Cycle	<i>30 Minutes</i>
Cleaup as Preference setting	<i>Yes</i>
Ozone	With Heater Pump*
Ozone Suppression	OFF
Pump Purge	60 Seconds
Blower/MicroSilk® Purge	30 Seconds
Mister Purge	5 Seconds
Purge Type	Serial - Pumps at lowest speed

\* The heater Pump can be either a Circ Pump or Pump 1 Low.

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.

# BP2100 Configuration Options

## Temperature Features

Feature	Default
Temperature Display	°C

All temperatures must be specified in °F. The system converts °F to °C dynamically. If Celsius is required for default settings, choose a desired °C value that (after rounding) corresponds to a Fahrenheit value.

°C	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
°F	39	41	43	45	46	48	50	52	54	55	57	59	61	63	64	66	68	70	72
°C	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
°F	73	75	77	79	81	82	84	86	88	90	91	93	95	97	99	100	102	104	

Hi-Range Min. Set Temp	80°F
Hi-Range Max. Set Temp	104°F
Hi-Range Default Temp*	100°F
Lo-Range Min. Set Temp	50°F
Lo-Range Max. Set Temp	99°F
Lo-Range Default Temp*	70°F
Freeze Threshold	44°F
Freeze Type	Rotating - Pumps at Lowest Speed
Temp Lock Type	Temp + Settings

*\*May be changed by end-user (if enabled)*

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.



# BP2100 Configuration Options

---

## Time Features

Feature	Default
Time Format*	24 Hour
Filter 1 Start Hour*	20:00 (8:00 PM)
Filter 1 Duration*	2 Hours
Filter Cycle 2 Default*	OFF
Filter 2 Start Hour*	08:00 (8:00 AM)
Filter 2 Duration*	15 Minutes
Light Cycle	Disabled
Light Cycle Default*	OFF
Light Cycle Start Hour*	21:00 (9:00 PM)
Light Cycle Duration*	15 Minutes
Cooling Time A	1 Minute
Cooling Time B	5 Minutes

*\*May be changed by end-user (if enabled)*

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.

# BP2100 Configuration Options

---

## Reminder Features

Feature	Default
Reminders Shown*	<i>Yes</i>
Check pH	<i>OFF</i>
Check Sanitizer	<i>OFF</i>
Clean Filter	30 Days
Test GFCI	<i>65 Days</i>
Drain Water	<i>100 Days</i>
Change Cartridge	OFF
Clean Cover	<i>OFF</i>
Treat Wood	<i>OFF</i>
Change Filter	365 Days

*\*May be changed by end-user (if enabled)*

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.

# BP2100 Configuration Options

---

## Special Features

### Feature

### Default

Special Amperage Rule A

No Limitation

Special Amperage Rule B

Blower and MicroSilk® turn off when all pumps are on high speed

Drain Mode

Disabled

Demo Mode

Disabled

GFCI Trip

Not Applicable for CE Models

Ozone Slaved to Heater Pump

*Yes in circ setups*  
*No in non-circ setups*

Dual Voltage Heater

Always Input Voltage

Safety Suction

Disabled

# TP400 Panel Configuration

## Button Layout Table for TP400T

Button #	Setup 1
1	Temperature
2	Jets 1
3	Light 1
4	MicroSilk®
LED 1	Heater ON
LED 2	Jets 1 ON
LED 3	Light ON
LED 4	MicroSilk®

### TP400T CE

50332-XX ▶

Includes Overlay PN 12741



The TP400T is mainly suitable for Setups 8, 10 & 16. In other Setups an AX10 A2 for Jets 2 and/or an AX10 A3 for Blower will be required.

MicroSilk® is a registered trademark of Jason International

Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.


# TP600 Panel Configuration

## Button Layout Table

Button #	Pump 2 Setups 1 - 6, 11 - 14	No Pump 2, Blower Setups 7, 9, 15	No Pump 2, No Blower Setups 8, 10, 16
1	Jets 1	Jets 1	Jets 1
2	Jets 2	Blower	Unused
3	MicroSilk®	MicroSilk®	MicroSilk®
4	Up	Up	Up
5	Light 1	Light 1	Light 1
6	Down	Down	Down
LED 1	Jets 1	Jets 1	Jets 1
LED 2	Jets 2	Blower	Unused
LED 3	Light 1	Light 1	Light 1
LED 4	Heat On	Heat On	Heat On

\* When using setups in column 1, which operate both a Pump 2 AND a Blower, Pump 2 is on the main panel (Button 2) and Blower must be operated with an Auxilliary Panel - AX10A3 on Bank 1 (J5).

See Page 21.

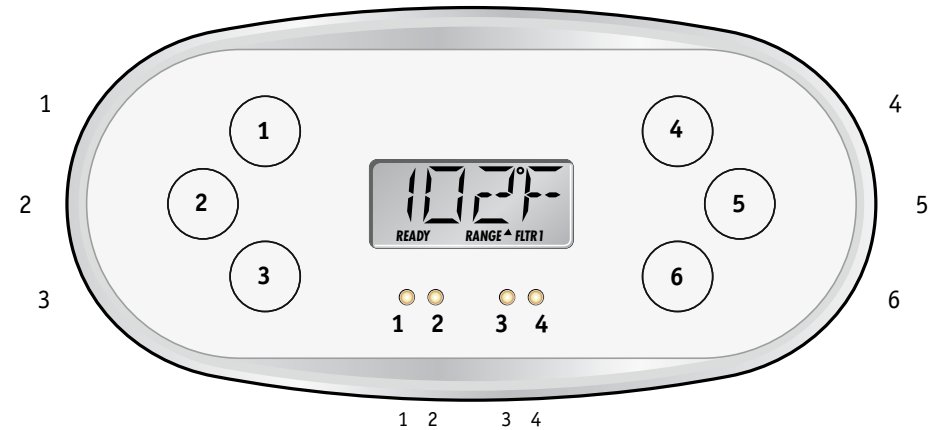

## TP600

Panel 50439-XX - Includes Overlay 13142 - can be used with all Setups.






# TP800 Panel Configuration




**Button Layout Table**

Feature #	Pump 2, Blower & Circ Setups 1, 3, 5	NO Pump 2, Blower & Circ Setups 7, 9	Pump 2, NO Blower & Circ Setups 3, 4, 6	NO Pump 2, NO Blower & Circ Setups 8, 10	Pump 2, Blower & NO Circ Setups 11, 13	NO Pump 2, Blower & NO Circ Setup 15	Pump 3, NO Bl & NO Circ Setups 12, 14	NO Pump 2, NO Bl & NO Circ Setup 16
A1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
A2	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1
A3	Jets 2	Blower	Jets 2	MicroSilk®	Jets 2	Blower	Jets 2	MicroSilk®
A4	Blower	MicroSilk®	MicroSilk®	Light 1	Blower	MicroSilk®	MicroSilk®	Light 1
A5	MicroSilk®	Light 1	Light 1	Invert	MicroSilk®	Light 1	Light 1	Invert
A6	Light 1	Invert	Invert	(Circ Icon)	Light 1	Invert	Invert	Undefined
A7	Invert	(Circ Icon)	(Circ Icon)	Undefined	Invert	Undefined	Undefined	Undefined
A8	(Circ Icon)	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
A9	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
A10	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
A11	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
A12	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
A13	Jets 1	Undefined	Undefined	Undefined	Jets 1	Undefined	Undefined	Undefined
A14	Jets 2	Undefined	Undefined	Undefined	Jets 2	Undefined	Undefined	Undefined
A15	Blower	Undefined	Undefined	Undefined	Blower	Undefined	Undefined	Undefined
A16	Light	Undefined	Undefined	Undefined	Light	Undefined	Undefined	Undefined
B1	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1
B2	Jets 2	Blower	Jets 2	Undefined	Jets 2	Blower	Jets 2	Undefined
B3	MicroSilk®	MicroSilk®	MicroSilk®	MicroSilk®	MicroSilk®	MicroSilk®	MicroSilk®	MicroSilk®
B4	Light 1	Light 1	Light 1	Light 1	Light 1	Light 1	Light 1	Light 1

## Spa Screen



## Shortcuts Screen



**Note:** Buttons 11 and 12 are not used in this configuration.  
Button 1 is fixed.

*A Circ Icon will appear when a Circ Pump is configured.*

# TP800 Panel Configuration

## TP800

Panel 50438-XX - Includes Overlay 13141 - can be used with all Setups.



Panel 50318-XX – Includes Overlay 12719 – can be used with Setups 1-6 and 11-14.



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.



# TP900 Panel Configuration

**Button Layout Table**



Button #	Pump 2, Blower & Circ Setups 1, 3, 5	NO Pump 2, Blower & Circ Setups 7, 9	Pump 2, NO Blower & Circ Setups 3, 4, 6	NO Pump 2, NO Blower & Circ Setups 8, 10	Pump 2, Blower & NO Circ Setups 11, 13	NO Pump 2, Blower & NO Circ Setup 15	Pump 3, NO Bl & NO Circ Setups 12, 14	NO Pump 2, NO Bl & NO Circ Setup 16
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
2	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1
3	Jets 2	Blower	Jets 2	MicroSilk®	Jets 2	Blower	Jets 2	MicroSilk®
4	Blower	MicroSilk®	MicroSilk®	Light 1	Blower	MicroSilk®	MicroSilk®	Light 1
5	MicroSilk®	Light 1	Light 1	Invert	MicroSilk®	Light 1	Light 1	Invert
6	Light 1	Invert	Invert	(Circ Icon)	Light 1	Invert	Invert	Undefined
7	Invert	(Circ Icon)	(Circ Icon)	Undefined	Invert	Undefined	Undefined	Undefined
8	(Circ Icon)	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
9	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
10	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined	Undefined
11	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
13	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1	Jets 1
14	Jets 2	Blower	Jets 2	MicroSilk®	Jets 2	Blower	Jets 2	MicroSilk®
15	MicroSilk®	MicroSilk®	MicroSilk®	Light	MicroSilk®	MicroSilk®	MicroSilk®	Light
16	Light	Light	Light	Invert	Light	Light	Light	Invert

A Circ Icon will appear when a Circ Pump is configured.



# TP900 Panel Configuration

Button #
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16

## Spa Screen



## Shortcuts Screen



Manufactured under one or more of these patents. U.S. Patents: 5332944, 5361215, 5550753, 5559720, 5,883,459, 6253227, 6282370, 6590188, 6976052, 6965815, 7030343, 7,417,834 b2, Canadian Patent: 2342614, Australian patent: 2373248 other patents both foreign and domestic applied for and pending. © Copyright 2012 Balboa Water Group.



# BP2100 Configuration Options

---

## Auxilliary Panel Features on Bank 1\*

Feature	Default
Aux Button A1	Jets 1
Aux Button A2	Jets 2
Aux Button A3	Blower
Aux Button A4	Light

## Auxilliary Panel Features on Bank 2\*

Feature	Default
Aux Button A5	Jets 1
Aux Button A6	Jets 2
Aux Button A7	MicroSilk®
Aux Button A8	Light

Buttons that are assigned to equipment that is not defined in a Setup will not do anything in that Setup.

\*Bank 1 consists of J5 on the Main Circuit Board.

Bank 2 consists of J8 on the Main Circuit Board.


**Aux Connection Splitter PN 25257 may be required.**

# BP2100 Configuration Options

## Auxilliary Panel Features

### AX10 Panels on Bank 1\*

A1, AX10A1	No O/L	52803
A2, AX10A2	No O/L	52804
A3, AX10A3	No O/L	52805
A4, AX10A4	No O/L	52806



Call Customer Service for additional information about Auxiliary Panels.


### AX10 Panels on Bank 2\*

A5, AX10A1	No O/L	52803
A6, AX10A2	No O/L	52804
A7, AX10A3	No O/L	52805
A8, AX10A4	No O/L	52806

\*Bank 1 consists of J5 on the Main Circuit Board.  
Bank 2 consists of J8 on the Main Circuit Board.  
**Aux Connection Splitter PN 25257 may be required.**

### AX20


AX20 A1A2	No O/L	52800
AX20 A1A3	No O/L	52801
AX20 A1A4	No O/L	52802

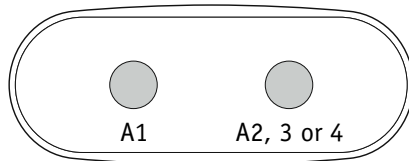

**AX20 Auxiliary Panel plugged into Bank 1 will operate A1 + A2, A3 or A4.**  
**AX20 Auxiliary Panel plugged into Bank 2 will operate A5 + A6, A7 or A8.**

### AX40

AX40	No O/L	52799
------	--------	-------

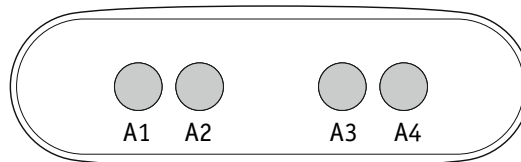


**AX40 Auxiliary Panel plugged into Bank 1 will operate A1 + A2, A3 and A4.**  
**AX40 Auxiliary Panel plugged into Bank 2 will operate A5 + A6, A7 and A8.**

# BP2100 Configuration Options

## Remote Panel Features

Feature	Default
Remote Button A1	Jets 1
Remote Button A2	Jets 2
Remote Button A3	Undefined
Remote Button A4	Blower
Remote Button A5	Light
Remote Button A6	Undefined
Remote Button A7	Undefined
Remote Button A8	Undefined



Buttons that are assigned to equipment that is not defined in a Setup will not do anything in that Setup.

Remote Panel Part Number \_\_\_\_\_  
Overlay Part Number \_\_\_\_\_